


SECTION A-A

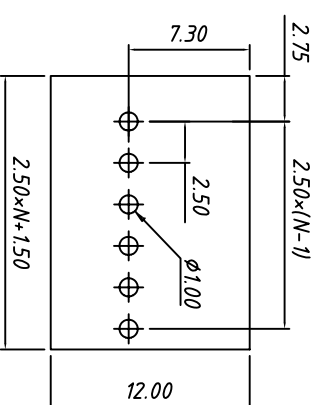

C type PCB LAYOUT

1 2 3 4 5 6 7 8

A B C D E F G H

Material
 Pin header: Phosphor bronze, Tin plated
 Housing: PA66, UL94V-0

Electrical
 Rated voltage: 300V
 Rated current: 4A
 Wire range: 28~20AWG 0.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C±5 °C for SS
 Strip length: 9~10 mm

Order Information

L-KLS2-2.50V-5.00-XXP-1 C
 RoHS Terminal Block
 Pitch
 No. of Pole

Product Code: C
 Color: 1-Gray
 5-Orange

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X. ±0.60	X. ±5°	X. ±3°	PROJECTION	mm	44
X ±0.38		.XX ±2°	UNITS		
XX ±0.25			SHEET SIZE		
Draw by 2015-09-01	Check by 2015-09-15		SCALE		

Description:
 Spring Clamp Terminal Block 2.50mm

KLS P/N: KLS2-2.50V-5.00-XXP-1C

KLS ELECTRONIC CO., LTD.

1 2 3 4 5 6 7 8

A B C D E F G H