
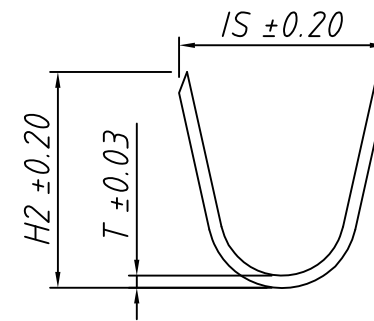
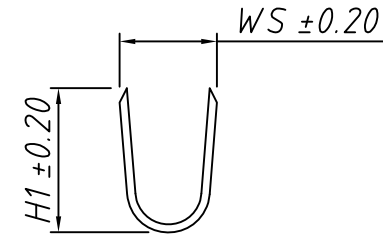


1  
RoHS Compliant

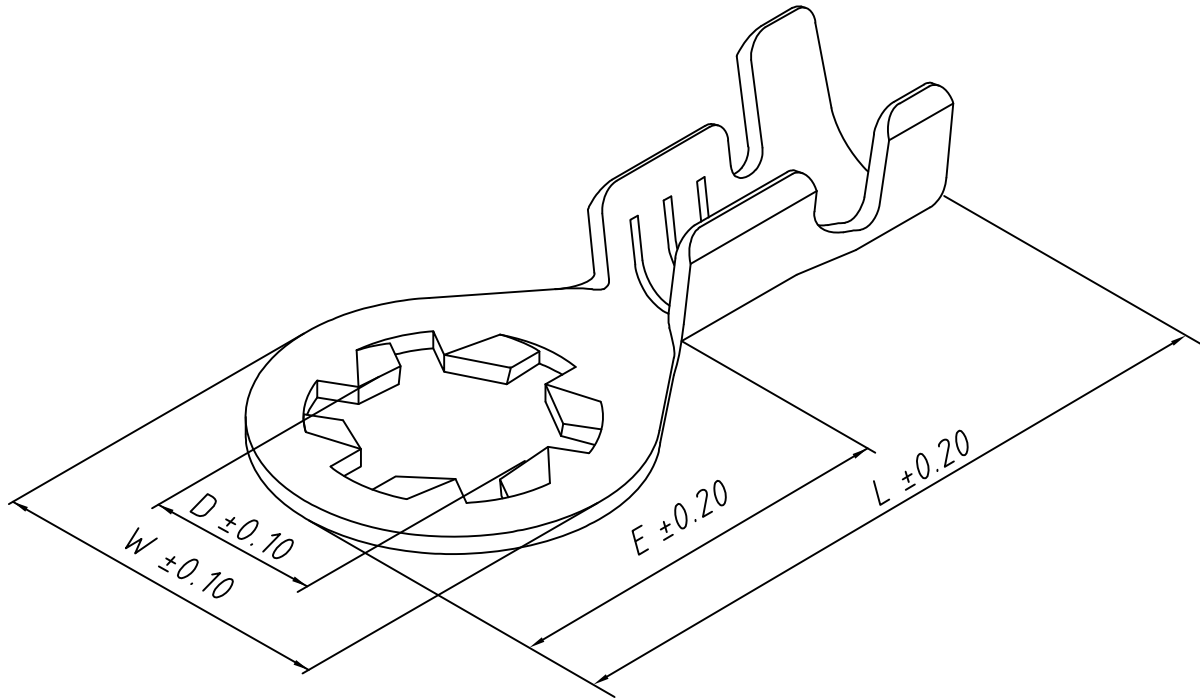


Note:

1. Appearance: Terminal cannot be corrected, scratched or oxidized

2. Material:

Brass C2680,, Tin plating

P/N	Material	Plating	Dimension(mm)									Wire Range	Q'TY
			D	W	E	L	T	H1	WS	H2	IS	AWG	REEL
L-KLS8-SRD250401	Brass	Tin	2.50	6.0		12.2	0.40	3.20	3.00	4.25	4.80	18~20	15000
L-KLS8-SRD320401	Brass	Tin	3.20	7.0	8.7	16.0	0.40	3.30	3.50	4.60	4.80	16~20	7500
L-KLS8-SRD320501	Brass	Tin	3.20	7.0	8.7	16.0	0.50	3.30	3.50	4.60	4.80	16~20	7500
L-KLS8-SRD370601	Brass	Tin	3.70	9.4	11.5	20.0	0.60	4.20	4.00	5.30	5.50	16~20	5000
L-KLS8-SRD430601	Brass	Tin	4.30	10	13.1	21.2	0.60	4.20	3.70	5.90	5.70	16~20	5000
L-KLS8-SRD430501	Brass	Tin	4.30	8.6	11.5	19.5	0.50	3.40	3.50	5.10	5.00	16~20	5000
L-KLS8-SRD430401	Brass	Tin	4.30	8.6	11.5	19.5	0.40	3.40	3.50	5.10	5.00	16~20	5000
L-KLS8-SRD430402	Brass	Tin	4.30	8.6	11.5	19.5	0.50	4.10	4.30	4.90	7.40	14	5000
L-KLS8-SRD510501	Brass	Tin	5.10	9.8	11.0	19.3	0.50	4.00	3.30	5.00	5.20	18~20	5000

TOLERANCE		PROJECTION	Description:
0 - 3mm	±0.10	UNITS	mm
3 - 6mm	±0.15	SHEET SIZE	A4
6 - 10mm	±0.20	KLS P/N: KLS8-SRDXXXXXX	
10 - 30mm	±0.25	KLS P/N: KLS8-SRDXXXXXX	
Draw: Daniel	ANGLE ±3°	 NingBo KLS ELECTRONIC CO.,L TD.	
Check: Daniel	Data: 2019-04-10		