


Material  
Housing: PA66, UL94V-0  
Pin header: Copper alloy, Sn plated  
Electrical  
Rated voltage: 300V  
Rated current: 10A  
Contact Resistance: 20mΩ  
Insulation resistance: 500MΩ/DC500V  
Withstand voltage: AC2000V / 1min  
Mechanical  
Temp. Range: -40 °C ~ +105 °C  
Max Soldering: 250°C for 5 Sec

*Order Information*

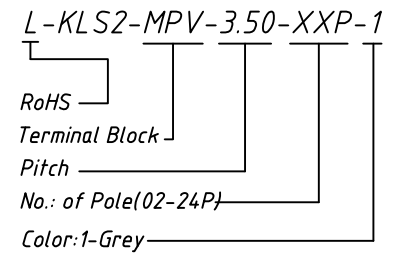

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X. ±0.60		X. ±5°		3.5mm Solder pin holder (fail-safe)	
.X ±0.38		.X ±3°			
.XX ±0.25		.XX ±2°		KLS P/N:	L-KLS2-MPV-3.50-XXP-1
Draw by	2015-09-01	PROJECTION			NingBo KLS ELECTRONIC CO.,L TD.
Check by	2015-09-15	UNITS	mm		
SCALE		SHEET SIZE	A4		